



## Mechanical Iron Straightening Cutting Machine Automatic Straighten And Cut Wire

### Our Product Introduction

for more products please visit us on [wire-bendingmachine.com](http://wire-bendingmachine.com)

#### Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Jin Hongxiang
- Certification: CE
- Model Number: JZ2-5
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Export safety wooden case
- Delivery Time: 5-10 days or negotiation
- Supply Ability: 50 Set/Sets per Month



#### Product Specification

- Product Name: Straightening And Cutting Machine
- Core Components: Motor, Cast Iron, Machined Parts
- Power: 0.75+1.5KW
- Warranty: 1 Year, 1 Years
- Key Selling Points: Fully Automatic, Low Price, Small Straightening Length Error,
- Applicable Industries: Widely Used In Hardware, Machinery, Electrical, Instrumentation, Construction And Other Industries.
- Weight (KG): 260
- Control System: Fully Automatic, Low Price, Small Straightening Length Error,
- MOQ: 1 Set
- Advantage: Cost Effective
- Port: Guangzhou
- Highlight: **Mechanical Straightening Cutting Machine,**  
Iron Straightening Cutting Machine




## Product Description

### Iron Wire Straightening And Cutting Machine Mechanical

#### Performance Characteristics

1. It is suitable for straightening and cutting carbon steel wire, stainless steel wire, iron wire, non-ferrous metal wire with high hardness, etc.
2. Reasonable structure, beautiful appearance and low noise.
3. Mechanical accessories are well made, exquisitely assembled and have long service life.
4. It is divided into various models, large, medium and small, and the input voltage is 380V.
5. Automatic straightening and cutting, wire feeding speed 16-28m / min, length error plus or minus 0.2mm.
6. Cutting length range: 50-2000mm. All copper motor.
7. Main configuration: 1 main machine, 2m fixed length rod and 1 feeding line frame.
8. Vulnerable accessories: 2 cutters, 2 wire holes and 2 sets of straightening blocks (nodular cast iron).

| Model                         | JZ1-2.5     | JZ2-5      | JZ5-9      | JZ9-12     | JZ12-16    |
|-------------------------------|-------------|------------|------------|------------|------------|
| Max.diameter                  | φ2.5mm      | φ5mm       | φ9mm       | φ12mm      | φ16mm      |
| length                        | 1000mm      | 2000mm     | 2000mm     | 2000mm     | 2000mm     |
| Straighten deliver link speed | 16-25m/min  | 16-25m/min | 16-25m/min | 15-18m/min | 15-18m/min |
| Power                         | 0.75+0.55kw | 0.75+1.5kw | 3+4kw      | 3+7.5kw    | 3+10kw     |
| Weight                        | 150kg       | 265kg      | 465kg      | 620kg      | 820kg      |

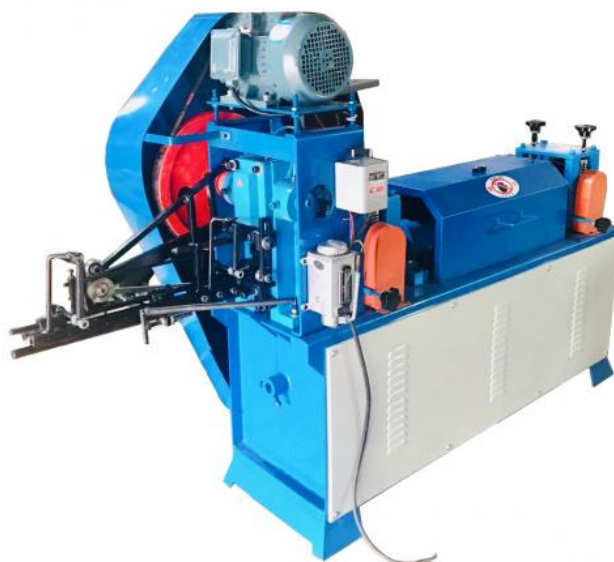





**Dongguan Jinghongxiang Automation Equipment Co., Ltd.**



13925780098



jhx16888@gmail.com



wire-bendingmachine.com

No. 78, Shangzhong Road, Shangdi Industrial Zone, Liaobu Town, Dongguan, Guangdong, China